




## ENSURING YOUR TAP FITS PERFECT

This instruction is only necessary for taps that don't tighten at the perfect downward position.

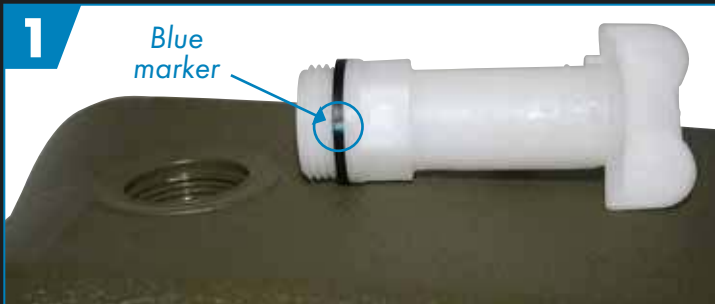

1 Remove tap from water can to inspect tap seal. The seal will have a blue marker showing on its outer edge.



2 Remove the seal from the tap.



3 Position seal so that the outer edge with blue marker now sits against ridge facing away from tap thread.



4 Wrap seal back into position, noting the blue marker edge remains facing away from tap thread.



5 Seal should now taper towards tap thread, reducing the area of contact it makes with can thread when tightened.



6 Fasten tap back into position on Can with tap now able to correctly tighten off in downward position.

**BECAUSE AT PRO QUIP, QUALITY MATTERS**

**PRO QUIP INTERNATIONAL**

14 LONDON DRIVE (PO BOX 852) BAYSWATER, VIC 3153  
PH: 03 9761 1110 sales@proquip.com.au



[www.proquip.com.au](http://www.proquip.com.au)